



DESIGN
PLAN
BUILD

2026 ARCHITECTURAL
PRODUCT GUIDE

THE PURSUIT OF BETTER

OUR TECHNOLOGIES



DesignLoc® technology is a two-stage manufacturing process that creates a refined surface while reinforcing a stronger, coarser base. This process enhances durability and reduces the potential for colour fading, ensuring a long-lasting, high-quality finish.



ChromaTec™ is a factory-applied protective surface enhancer that creates a barrier against stains from external elements. This coating not only helps to resist staining but also enhances the vibrancy and colour longevity of the product.



NanoBlast™ is a fine shot-blasting process that exposes specially selected aggregates on the product's surface. Combined with a brushed surface treatment, NanoBlast™ creates a striking textural contrast while delivering a more slip-resistant and comfortable finish.

EXPLORE BEST WAY STONE'S SERIES OF PRODUCTS THAT PROVIDE THEIR OWN UNIQUE ADVANTAGES TO YOUR SPACE

CLASSIC SERIES

The Classic Series represents the foundation of timeless design. These products focus on simplicity, durability, and functionality. Perfect for budget-conscious projects, the Classic Series delivers reliable performance without unnecessary embellishments – ideal for creating simple clean spaces.

SIGNATURE SERIES

The Signature Series elevates design with superior quality and refined finishes, thanks to Best Way Stone's innovative DesignLoc® technology. These products combine enhanced durability with style, perfectly balancing aesthetics and functionality. Whether you're designing a residential oasis or a commercial space, the Signature Series delivers exceptional detail and consistency that stand out without compromising practicality.

PREMIERE SERIES

Best Way Stone's Premiere Series sets the standard for luxury and innovation. Utilizing advanced technologies like NanoBlast™ and ChromaTec™, this series features high-end materials and cutting-edge manufacturing techniques. These premium products deliver unparalleled aesthetics and enhanced performance. Designed for those who seek to create truly remarkable spaces, the Premiere Series is where innovation meets elegance.



Since 1965, Best Way Stone has proudly stood as an independently owned and operated business built on a foundation of craftsmanship, quality and trust. For more than six decades, we have dedicated ourselves to delivering products that stand the test of time through style, durability, and the relationships we've formed along the way. At Best Way Stone, we believe that every product we produce is a commitment to you.

Being one of the few independently owned precast concrete manufacturers in the industry is more than just a distinction - it's what empowers us to deliver unparalleled service. Our independence ensures we remain flexible and responsive to the evolving needs of our customers by offering innovative solutions without ever compromising on quality.

Whether you're a homeowner transforming your outdoor space or a contractor seeking reliable, high-performance products to exceed client expectations, we're here to help bring your vision to life. Our pavers are backed by our lifetime guarantee, a testament to our unwavering commitment to you.

As we've grown, so too has our dedication to continuous improvement and exceptional service. Each member of our team is united by a shared mission: to provide you with an outstanding experience that is built on trust, innovation and craftsmanship.

Thank you for choosing Best Way Stone. We're here to support you - today, tomorrow, and for many years to come.

Warm regards,
The Best Way Stone Team

CONTENTS

2 GEOCERAMICA®

4 SLABS

- 6 Lyra™
- 8 Basketweave™
- 9 Spectra™
- 10 Solar Reflective
Rooftop Paver
- 11 Smooth & Shot Blast

12 STEPS

- 14 Forma™ Steps
- 15 Ikon™ Step
- 15 Ridge Step™

16 WALLS

- 18 Garden Lock™
- 20 Parkwall™
- 22 Ridgewall®
SRW System
- 24 Ikon™

26 PAVERS

- 28 Ashford™
- 29 Standard™
- 30 Adelaide® 80
- 31 EcoFlow®
- 32 Prisma™
- 33 Vanguard™
- 34 SRI Values &
Specifications
- 35 Our Locations

 Vehicle use permitted

 Eco-Friendly

 Pedestrian traffic only

 Permeable

 Vibrating plate permitted
(rubber membrane required)

 Made with DesignLoc® surface refinement technology


 Enhanced with our factory applied ChromaTec™ protective surface treatment

 Enriched with NanoBlast™ technology

 New for 2026



UNITS



24 x 24


23.62 x 23.62 x 1.6 in
600 x 600 x 40 mm
Units/bundle: 28




12 x 24

11.81 x 23.62 x 1.6 in
300 x 600 x 40 mm
Units/bundle: 56

BUNDLE OVERVIEW

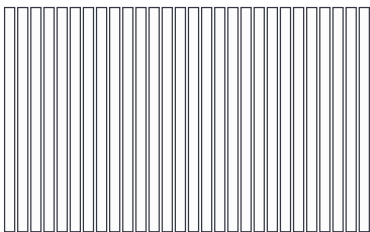


COLOURS




Pearle



Sable



Smoke



Taupe

NOTES

Backed by almost a decade of research, testing, and over 90 million square feet installed, GeoCeramica® is the leading choice for a variety of design applications such as patios, pool decks, walkways, entryways, rooftops and public spaces.


BUNDLE SPECIFICATIONS

24 x 24

	IMPERIAL	METRIC
Coverage per unit	3.87 ft ²	0.36 m ²
Weight per unit	70 lbs	31.75 kg
Lineal Coverage	108.4 ft ²	10.07 M ²
Weight	1960 lbs	889 kg

12 x 24

	IMPERIAL	METRIC
Coverage per unit	1.94 ft ²	0.18 m ²
Weight per unit	35 lbs	15.88 kg
Lineal Coverage	108.4 ft ²	10.07 M ²
Weight	1960 lbs	889 kg

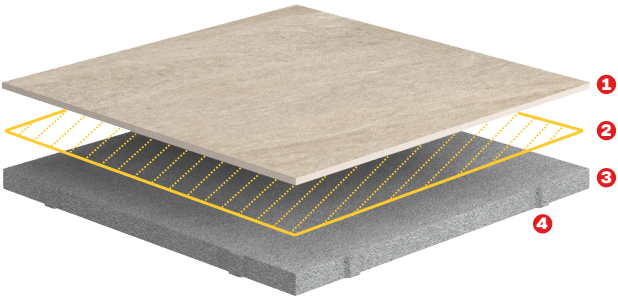

- 1 10 mm Porcelain Tile
- 2 AquaFerm® Bonding Layer
- 3 Stabikorn® Draining Subbase
- 4 Integrated 3 mm Spacer Bars




Explore details, view installation guidance, and request samples at:
[GeoCeramicaCanada.com](https://www.GeoCeramicaCanada.com)

Experience the beauty of porcelain combined with the strength and reliability of concrete. Now available in both Canada and the United States, this leading European innovation in paver technology brings unmatched durability and style to outdoor spaces, exclusively manufactured in Canada by Best Way Stone®.

EASY INSTALLATION

Unlike traditional outdoor porcelain pavers that require specialized installation methods, GeoCeramica® is designed to install just like concrete pavers — making it accessible, efficient, and ideal for a wide range of applications. GeoCeramica® installs just like a standard paver system or open-graded base system.

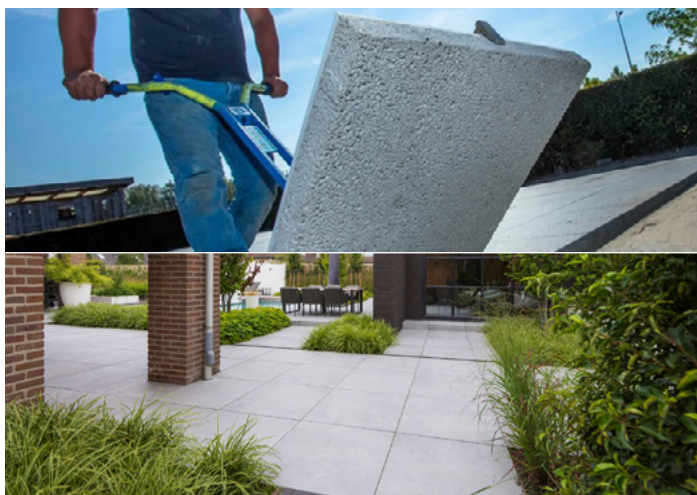

KEY INSTALLATION PRACTICES

Install GeoCeramica® on an open-graded base system. This allows water to drain through the Stabikorn® base and into the ground.

It is recommended to cut GeoCeramica® with a wet saw to reduce friction. Use a porcelain tile blade to ensure a clean cut edge.

The use of a roller compacter is permitted on GeoCeramica® to provide final leveling on your project.

Use a resin sand suited for GeoCeramica®'s 3mm joints. Better suited for smaller joints, resin sand lower required maintenance, increase durability, and promotes further permeability.

When finishing your edges, use a cementitious edging to hold in GeoCeramica® if the use of a curbing system is unavailable.

PORCELAIN + PAVER THE BEST OF BOTH WORLDS



WHY CHOOSE GEOCERAMICA®

Timeless Beauty: Porcelain textures and colours that stay vibrant year after year.

Built for Canadian Winters: Resists heaving, cracking, and climate stress.

Low Maintenance: No sealing required; easy to clean and pressure-wash safe.


Faster, Simpler Installs: Porcelain elegance without the complexity.

Design Without Compromise: Premium aesthetics with long-lasting durability.

Proven Worldwide: Trusted across Europe and now North America with over 90 million square feet installed.



SLABS

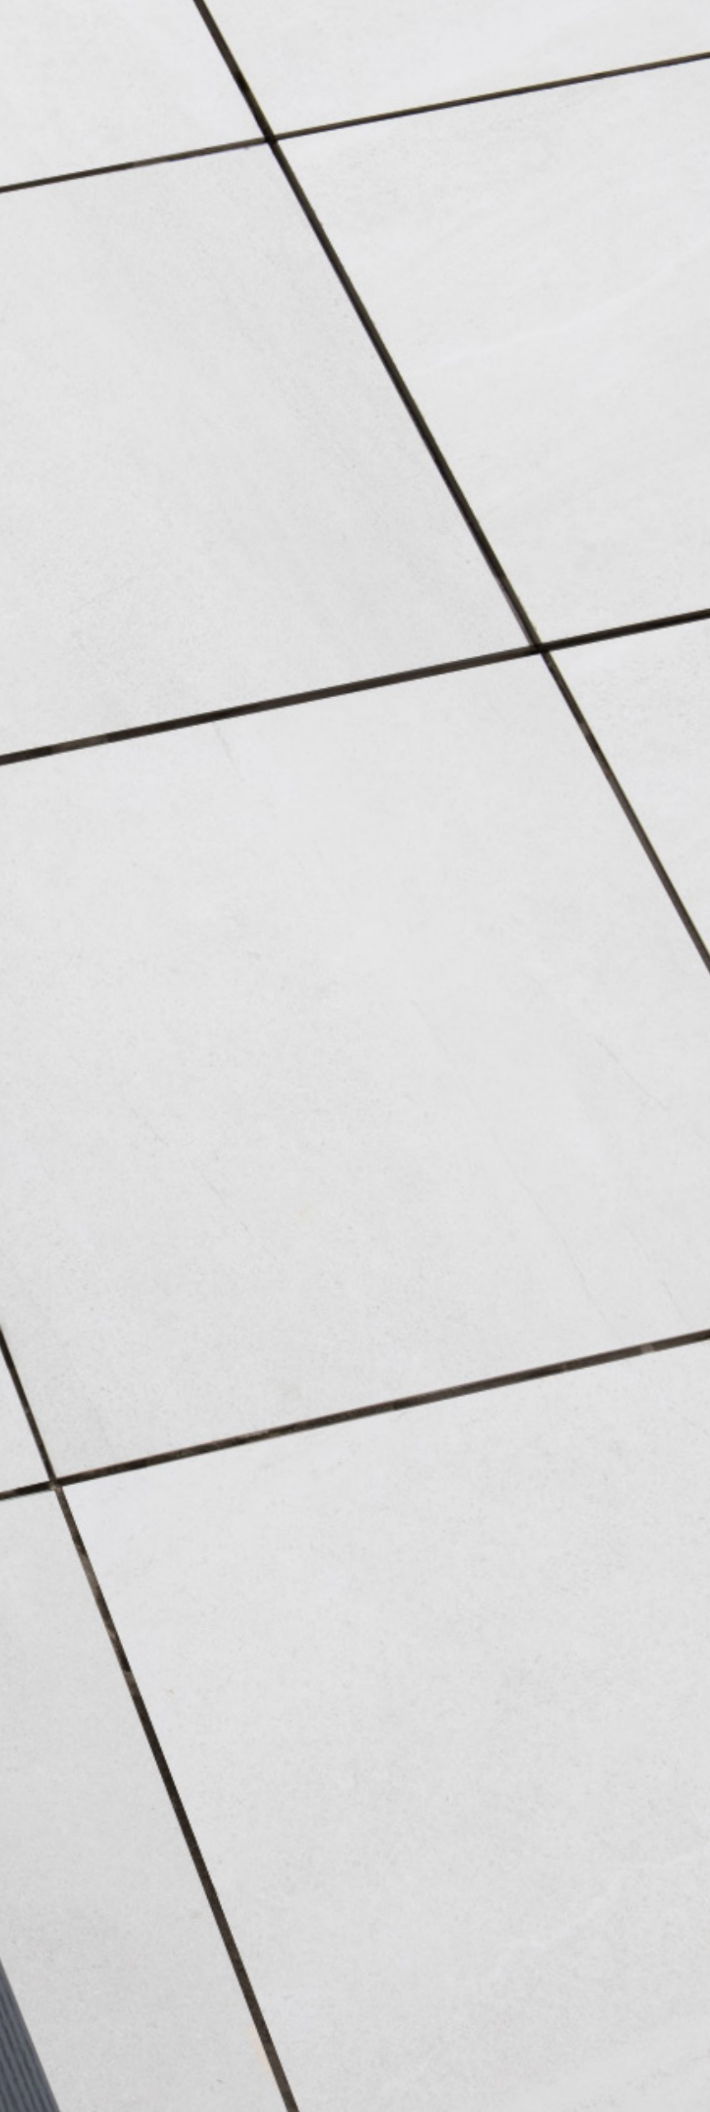

6	Lyra™
8	Basketweave™
9	Spectra™
10	Solar Reflective Rooftop Paver
11	Smooth & Shot Blast

UNITS



12 x 24

11.81 x 23.62 x 2.36 in
300 x 600 x 60 mm
Units/bundle: 54
Units/layer: 6

BUNDLE SPECIFICATIONS


	IMPERIAL	METRIC
Coverage	104.6 ft ²	9.72 m ²
Weight	3012 lbs	1366.2 kg
Layers	9	
Coverage per layer	11.62 ft ²	1.08 m ²
Lineal coverage	53.15 / 106.29 ft	16.2 / 32.4 m
Lineal coverage per layer	5.91 / 11.81 ft	1.8 / 3.6 m



12 x 36

11.81 x 35.4 x 2.36 in
300 x 900 x 60 mm
Units/bundle: 27
Units/layer: 3

	IMPERIAL	METRIC
Coverage	78.45 ft ²	7.29 m ²
Weight	2256 lbs	1023.3 kg
Layers	9	
Coverage per layer	8.71 ft ²	0.81 m ²
Lineal coverage	26.57 / 79.72 ft	8.1 / 24.3 m
Lineal coverage per layer	2.95 / 8.86 ft	0.9 / 2.7 m



24 x 24

23.62 x 23.62 x 2.36 in
600 x 600 x 60 mm
Units/bundle: 18
Units/layer: 2

	IMPERIAL	METRIC
Coverage	69.7 ft ²	6.47 m ²
Weight	1956 lbs	887.2 kg
Layers	9	
Coverage per layer	7.75 ft ²	0.72 m ²
Lineal coverage	35.43 ft	10.8 m
Lineal coverage per layer	3.94 ft	1.2 m



24 x 36

23.62 x 35.43 x 2.36 in
600 x 900 x 60 mm
Units/bundle: 18
Units/layer: 2

	IMPERIAL	METRIC
Coverage	104.6 ft ²	9.72 m ²
Weight	2992 lbs	1357 kg
Layers	9	
Coverage per layer	11.62 ft ²	1.08 m ²
Lineal coverage	53.15 / 106.3 ft	16.2 / 32.4 m
Lineal coverage per layer	5.9 / 11.81 ft	1.8 / 3.6 m




BUNDLE OVERVIEW




12 x 24



24 x 24

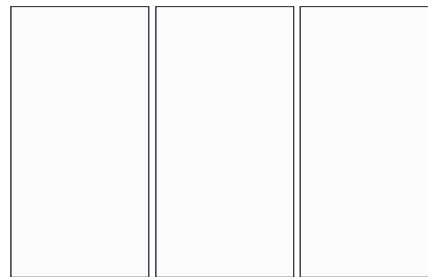

12 x 36



24 x 36

SIGNATURE COLOURS



Carrara



Colorado
Grey



Glacier
Creek



Pearl



Sandstone
Taupe




Ultra Black

Ultra Black available in 12 x 24 & 24 x 24.


PREMIERE COLOURS




Brightsand



Eclipse




Silverlight




Storm

Premiere colours available in 12x24 and 24x24.
All other sizes are special order.


PATTERNS




3/4 Off-Set
(Best Practice)




1/2 Off-Set




Herringbone



Tile Joint

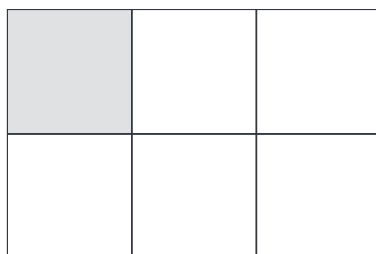

Tile Joint

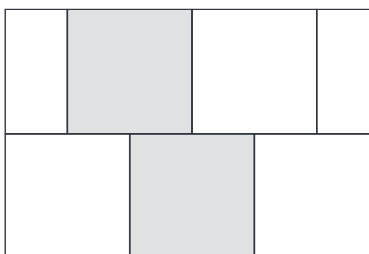

1/2 Off-Set

NOTES

For pedestrian use only. Large format slabs with a soft touch surface. Provides a contemporary finish that DesignLoc® technology allows for a highly refined surface, with integral colouring.

When installing slabs on pedestal set, ensure to consider load requirements. Refer to a project engineer for specific considerations.


Plate tamper not recommended.

BASKETWEAVE™

CLASSIC SERIES | 45 mm (50 & 60 mm)



UNITS



23.62 x 29.52 x 1.77 in
600 x 750 x 45 mm
Units/bundle: 24




23.62 x 23.62 x 1.77 in
600 x 600 x 45 mm
Units/bundle: 24



11.81 x 23.62 x 1.77 in
300 x 600 x 45 mm
Units/bundle: 72

COLOUR



White

NOTES

For pedestrian use only. Classic slabs do not include spacer bars. All sizes sold and packaged separately. Sold in full bundles only. The use of a plate tamper is not permitted.

When installing slabs on a pedestal set, ensure to consider load requirements. Refer to a project engineer for specific considerations.

50 mm & 60 mm available by special order.

BUNDLE SPECIFICATIONS


	24 x 30		24 x 24		12 x 24	
	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC
Coverage	116.22 ft ²	10.8 m ²	92.99 ft ²	8.64 m ²	139.48 ft ²	12.96 m ²
Weight	2539.7 lbs	1152 kg	2011.2 lbs	912 kg	2880 lbs	1305.36 kg
Units	24		24		72	
Coverage per unit	4.84 ft ²	0.45 m ²	3.87 ft ²	0.36 m ²	1.94 ft ²	0.18 m ²
Lineal coverage	47.24 / 59.04 ft	14.4 / 18 m	47.24 ft	14.4 m	70.86 / 141.72 ft	21.6 / 43.2 m
Lineal coverage per unit	1.97 / 2.46 ft	0.6 / 0.75 m	1.97 ft	0.6 m	0.98 / 1.97 ft	0.3 / 0.6 m

SPECIAL ORDER BUNDLE SPECIFICATIONS

	24 x 24 (50 mm)		24 x 24 (60 mm)	
	IMPERIAL	METRIC	IMPERIAL	METRIC
Coverage	77.49 ft ²	7.2 m ²	69.7 ft ²	6.47 m ²
Weight	1852 lbs	840 kg	1956 lbs	887.2 kg
Units	20		18	
Coverage per unit	3.87 ft ²	0.36 m ²	3.87 ft ²	0.36 m ²
Lineal coverage	39.37 ft	12 m	35.43 ft	10.8 m
Lineal coverage per unit	1.97 ft	0.6 m	1.97 ft	0.6 m



UNIT



23.62 x 23.62 x 2 in
600 x 600 x 50 mm
Units/bundle: 20

BUNDLE OVERVIEW




COLOURS



BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	77.49 ft ²	7.2 m ²
Weight	1852 lbs	840 kg
Units	20	
Coverage per unit	3.87 ft ²	0.36 m ²
Lineal coverage	39.37 ft	12 m
Lineal coverage per unit	1.97 ft	0.6 m

PATTERNS



Tile Joint



1/2 Off-Set

NOTES

Large format slab that adds a contemporary finish to any patio, poolside, walkway or rooftop application. Sold in full bundles only. For pedestrian use only. When installing slabs on a pedestal set, ensure to consider load requirements. Refer to a project engineer for specific considerations.

Plate tamper not recommended.


60 mm available by special order.

SOLAR REFLECTIVE ROOFTOP PAVER

PREMIERE SERIES | 50mm (45 & 60mm)



UNIT



23.62 x 23.62 x 2 in
600 x 600 x 50 mm
Units/bundle: 20

BUNDLE OVERVIEW



COLOUR



SR White (82)

PEDESTALS AVAILABLE (SPECIAL ORDER)



BUNDLE SPECIFICATIONS

50mm	IMPERIAL	METRIC
Coverage	77.49 ft ²	7.2 m ²
Weight	1840 lbs	834.6 kg
Units	20	-
Coverage per unit	3.87 ft ²	0.36 m ²
Lineal coverage	39.4 ft	12 m
Lineal coverage per unit	1.97 ft	0.6 m

45mm	IMPERIAL	METRIC
Coverage	92.99 ft ²	8.64 m ²
Weight	2148 lbs	974.4 kg
Units	24	-
Coverage per unit	3.87 ft ²	0.36 m ²
Lineal coverage	47.24 ft	14.4 m
Lineal coverage per unit	1.97 ft	0.6 m

60mm	IMPERIAL	METRIC
Coverage	69.74 ft ²	6.48 m ²
Weight	1956 lbs	887.2 kg
Units	18	-
Coverage per unit	3.87 ft ²	0.36 m ²
Lineal coverage	35.46 ft	10.8 m
Lineal coverage per unit	1.97 ft	0.6 m

NOTES

For pedestrian and rooftop terracing use only. Provides a smooth white surface for maximum reflectivity. Meets SRI LEED® requirements for low slope roofing of 82+. Special order item, minimum quantities and lead time required.

When installing slabs on a pedestal set, ensure to consider load requirements. Refer to a project engineer for specific considerations.


Special order available for 45 mm & 60 mm.

SMOOTH & SHOT BLAST

CLASSIC SERIES | 45 mm (50 & 60 mm)



UNITS



Smooth
23.62 x 23.62 x 1.77 in
600 x 600 x 45 mm
Units/bundle: 24



Shot Blast
23.62 x 23.62 x 1.77 in
600 x 600 x 45 mm
Units/bundle: 24

BUNDLE OVERVIEW



COLOURS



BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	92.99 ft ²	8.64 m ²
Weight	2011.2 lbs	912 kg
Units	24	
Coverage per unit	3.87 ft ²	0.36 m ²
Lineal coverage	47.24 ft	14.4 m
Lineal coverage per unit	1.97 ft	0.6 m

PATTERNS



Tile Joint



1/2 Off-Set

NOTES

A large format slab with a smooth surface finish. The 24x24 Smooth slab brings a modern touch to a traditional paving and rooftop terrace slab. Sold in full bundles only. When installing slabs on a pedestal set, ensure to consider load requirements. Refer to a project engineer for specific considerations.

Plate tamper not recommended.

50 mm & 60 mm available by special order.



STEPS



14 Forma™ Steps

15 Ikon™ Step

15 Ridge Step™

STEPS



UNITS

				 
36" #1 Forma™ Step 36w x 12d x 7h in 914w x 305d x 178h mm	36" #2 Forma™ Step 36w x 24d x 7h in 914w x 610d x 178h mm	48" #1 Forma™ Step 48w x 12d x 7h in 1219w x 305d x 178h mm	48" #2 Forma™ Step 48w x 24d x 7h in 1219w x 610d x 178h mm	12" Forma™ Step Filler 12w x 4.5d x 7h in 305w x 115d x 178h mm 24" Forma™ Step Filler 24w x 5.25d x 7h in 610w x 135d x 178h mm

BUNDLE SPECIFICATIONS

36" #1	IMPERIAL	METRIC
Weight	1598 lbs	725 kg
Units	15	-

36" #2	IMPERIAL	METRIC
Weight	1555 lbs	705 kg
Units	10	-


12" Filler	IMPERIAL	METRIC
Weight	2280 lbs	1034 kg
Units	24	-

48" #1	IMPERIAL	METRIC
Weight	1712 lbs	776 kg
Units	12	-

48" #2	IMPERIAL	METRIC
Weight	1874 lbs	850 kg
Units	10	-

24" Filler	IMPERIAL	METRIC
Weight	2220 lbs	1006.97 kg
Units	12	-

STEP & FILLER CROSS SECTION

ONE STEP	
TWO STEPS	
THREE STEPS	
FOUR STEPS	

COLOUR



NOTES

Forma™ Steps sold in full bundles only.
Fillers sold in pairs.



UNITS



Ikon™ Step
39.4w x 6.7h x 14d in
1000w x 170h x 355d mm

BUNDLE SPECIFICATIONS



	IMPERIAL	METRIC
Weight	2745 lbs	1245 kg
Units	9	-
Lineal coverage	29.5 ft	9 m
Lineal coverage per unit	3.28 ft	1 m


COLOURS



Grey



Ultra Black



Ridge Step™
39.4w x 7.68h x 19.7d in
1000w x 195h x 500d mm



	IMPERIAL	METRIC
Weight	2982 lbs	1352.4 kg
Units	6	-
Lineal coverage	19.68 ft	6 m
Lineal coverage per unit	3.28 ft	1 m

COLOURS



Grey



Grey Mix





WALLS



18	Garden Lock™
22	Parkwall®
24	Ridgewall® SRW System
20	Ikon™

GARDEN LOCK™

CLASSIC SERIES | DOUBLE-SIDED WALL | SPLIT-FACE

TRIPLE UNITS



LARGE

14.96w x 4.92h x 8.85d in
380w x 125h x 225d mm
Units: 25



MEDIUM

9.84w x 4.92h x 8.85d in
250w x 125h x 225d mm
Units: 25



SMALL

7.48w x 4.92h x 8.85d in
190w x 125h x 225d mm
Units: 25

BUNDLE OVERVIEW



COLOURS




Beige Mix



Grey



Grey Mix



Winterborn



Ultra Black
(Straight Coping
Only)

BUNDLE SPECIFICATIONS

Blocks	IMPERIAL	METRIC
Coverage	27.5 ft ²	2.55 m ²
Lineal coverage	67.26 ft	20.5 m
Weight	3113 lbs	1412.16 kg
Weight per triple	124.5 lbs	56.5 kg
Coverage per triple	1.1 ft ²	0.1 m ²
Lineal coverage per triple	2.69 ft	0.82 m
Sections	5	-
Coverage per section	5.5 ft ²	0.51 m ²
Lineal coverage per section	13.45 ft	4.1 m

NOTES



A double-sided split face wall that can be installed vertically or set-back. Specific medium blocks can be installed on their side, identified with locking feature along the vertical side of block unit.

Triple units are sold and packaged together in a 1:1:1 ratio. Use Arlington™ or Garden Lock™ coping for best finish.

Maximum height with set-back: 36" | Maximum height without set-back: 24"

20 wedge blocks and 20 wedge coping units make a circle with 53.5" outside diameter and 33" inside diameter.

TYPICAL CROSS SECTIONS

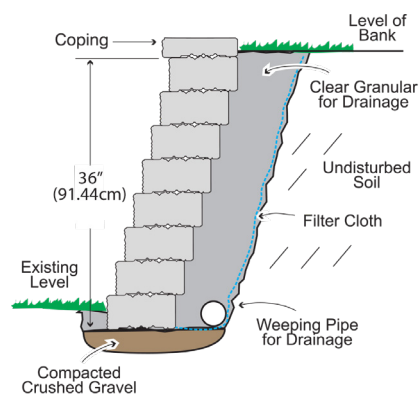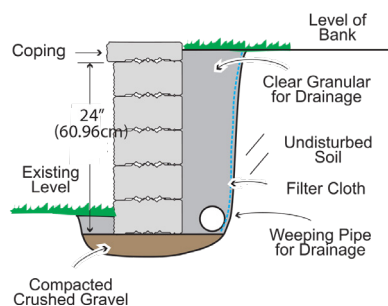



UNITS



STRAIGHT COPING

15.74w x 2.95h x 10.23d in
400w x 75h x 260d mm

BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Lineal coverage	84 ft	25.6 m
Weight	2458 lbs	1114.75 kg
Units	64	-
Lineal coverage per unit	1.31 ft	0.4 m
Sections	4	-
Lineal coverage per section	21 ft	6.4 m




CORNER

13.46w x 4.92h x 8.85d in
342w x 125h x 225d mm

	IMPERIAL	METRIC
Coverage	11.8 / 18.3 ft ²	1.1 / 1.7 m ²
Weight	1786 lbs	810 kg
Units	40	
Coverage per unit	0.3 / 0.4 ft ²	0.03 / 0.04 m ²
Lineal coverage	29.5 / 44.9 ft	9 / 13.68 m
Lineal coverage per unit	0.74 / 1.12 ft	0.23 / 0.34 m

Corner creates a 22.3" x 22.3" column base



WEDGE BLOCK

8.07(5.31)w x 4.92h x 8.85d in
205(135)w x 125d x 225d mm

	IMPERIAL	METRIC
Coverage	23 / 34.7 ft ²	2.14 / 3.22 m ²
Weight	3013 lbs	1366.45 kg
Layers	125	-
Coverage per unit	0.21 / 0.32 ft ²	0.02 / 0.03 m ²
Lineal coverage	55.38 / 84.06 ft	16.88 / 25.63 m
Lineal coverage per unit	0.46 / 0.66 ft	0.2 / 0.14 m



WEDGE COPING

8.23(5.17)w x 2.95h x 10.23d in
209(131)w x 75h x 260d mm

	IMPERIAL	METRIC
Weight	2635 lbs	1195.31 kg
Units	160	-
Lineal coverage	55.25 / 87.89 ft	16.82 / 26.76 m
Lineal coverage per unit	0.35 / 0.55 ft	0.11 / 0.17 m

PARKWALL®

CLASSIC SERIES / SPLIT-FACE WALL / DOUBLE-SIDED OPTION / SINGLE SIDE SMOOTH OPTION

UNITS



REGULAR BLOCK

7.87w x 5.9h x 11.61d in
200w x 150h x 295d mm

TAPERED BLOCK

7.87w (6.89w) x 5.9h x 11.61d in
200w (175w) x 150h x 295d mm

BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	20 ft ²	1.85 m ²
Lineal coverage	40 ft	12 m
Weight	2575 lbs	1167.95 kg
Units	60	-
Coverage per unit	0.34 ft ²	0.03 m ²
Lineal coverage per unit	0.67 ft	0.2 m



CORNER

7.87w x 5.9h x 11.61d in
200w x 150h x 295d mm

	IMPERIAL	METRIC
Coverage	-	-
Lineal coverage	15.75 / 23.23 ft	4.8 / 7.08 m
Weight	1064 lbs	482.6 kg
Units	24	-
Coverage per unit	-	-
Lineal coverage per unit	0.66 / 0.97 ft	0.2 / 0.3 m



COPING

23.62w x 2.95h x 11.81d in
600w x 75h x 300d mm

	IMPERIAL	METRIC
Coverage	64 ft	19.2 m
Weight	2144 lbs	972 kg
Units	32	-
Lineal coverage per unit	2 ft	0.6 m
Sections	4	-
Lineal coverage per section	16 ft	4.8 m

NOTES

A single-sided split face wall, with a double-sided option. Regular and tapered blocks can be split along back joint to remove smooth face and create double-sided finish.


Can be installed vertically or set-back, front-facing or reversed, or any combination.

Alternate a full 4 corner column row of the same indicated corners (Rights / Lefts) to make a 19.5" x 19.5" column base.

Maximum height with set-back: 48"


Maximum height without set-back: 30"

EXAMPLE CROSS SECTIONS

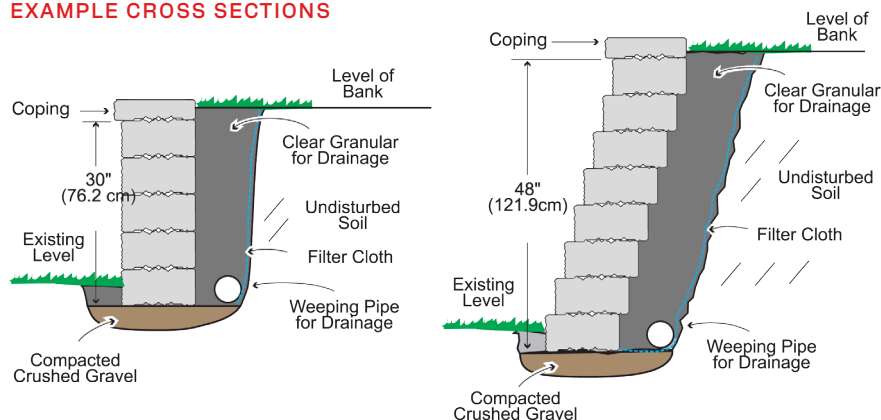





BUNDLE OVERVIEW

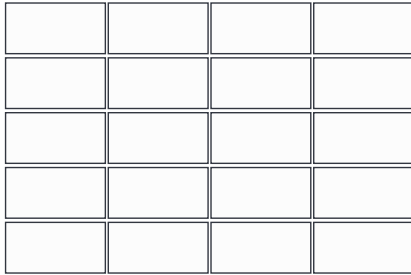

Regular & Tapered Block

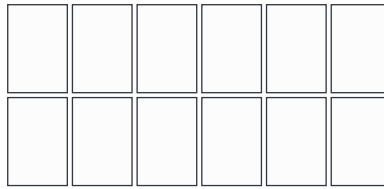

Corners

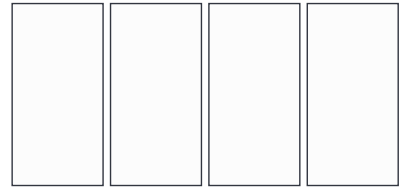

Coping

COLOURS



Beige Mix




Grey



Grey Mix



Winterborn



Ultra Black
(Coping Only)

DESIGN VERSATILITY

Split-Face Vertical



Smooth-Face Accent




In / Out-Set Accent



Smooth-Face In / Out-Set



Combination Accenting



No block manipulation required. Simply turn the block, or set in and out as desired along the patented locking feature.

RIDGEWALL®

CLASSIC SERIES | LARGE SEGMENTAL RETAINING WALL SYSTEM

UNITS



435 Split Block / 435 Smooth Block

39.4w x 7.68h x 17.1d in
1000w x 195h x 435d mm



90° Corner

36.9w x 7.68h x 17.1d in
937.5w x 195h x 435d mm



45° Corner

39.4w x 7.68h x 17.1d in
1000w x 195h x 435d mm



Coping

39.4w x 7.68h x 19.7d in
1000w x 195h x 500d mm



870 Double

39.4w x 7.68h x 34.25d in
1000w x 195h x 870d mm

BUNDLE SPECIFICATIONS

435 Split / Smooth

	IMPERIAL	METRIC
Coverage	12.61 ft ²	1.2 m ²
Lineal coverage	19.68 ft	6 m
Weight	2370 lbs	1075.2 kg
Units	6	-
Coverage per unit	2.1 ft ²	0.2 m ²
Lineal coverage per unit	3.28 ft	1 m

Coping

	IMPERIAL	METRIC
Coverage	12.61 ft ²	1.2 m ²
Lineal coverage	19.68 ft	6 m
Weight	2982 lbs	1352.4 kg
Units	6	-
Coverage per unit	2.1 ft ²	0.2 m ²
Lineal coverage per unit	3.28 ft	1 m

90° Corner

	IMPERIAL	METRIC
Coverage	17.22 ft ²	1.62 m ²
Lineal coverage	26.97 ft	8.24 m
Weight	2340 lbs	1061.4 kg
Units	6	-
Coverage per unit	2.87 ft ²	0.27 m ²
Lineal coverage per unit	4.49 ft	1.37 m


45° Corner

	IMPERIAL	METRIC
Coverage	13.5 ft ²	1.26 m ²
Lineal coverage	21.45 ft	6.56 m
Weight	2226 lbs	1009.8 kg
Units	6	-
Coverage per unit	2.25 ft ²	0.21 m ²
Lineal coverage per unit	3.57 ft	1.09 m

870 Double

	IMPERIAL	METRIC
Coverage	6.30 ft ²	0.600 m ²
Lineal coverage	9.85 ft	3 m
Weight	2370 lbs	1075.2 kg
Units	3	-
Coverage per unit	2.10 ft ²	0.4 m ²
Lineal coverage per unit	3.28 ft	1 m

RIDGE & KEY SYSTEM

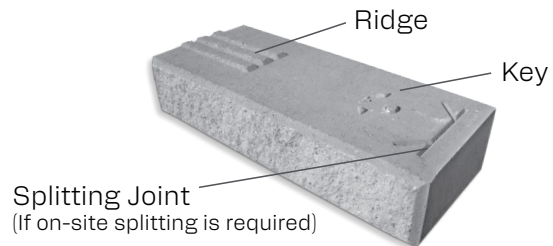

NOTES

When installing the RidgeWall®, install units ridge-to-ridge and key-to-key where possible. Can be installed vertically or with 50mm set-back. **Engineering services available, email sales@bestwaystone.com for more details.**




BUNDLE OVERVIEW (ALL UNITS)



COLOURS



Grey




Smooth Grey






Grey Mix
(Coping only)

TYPICAL CROSS SECTION



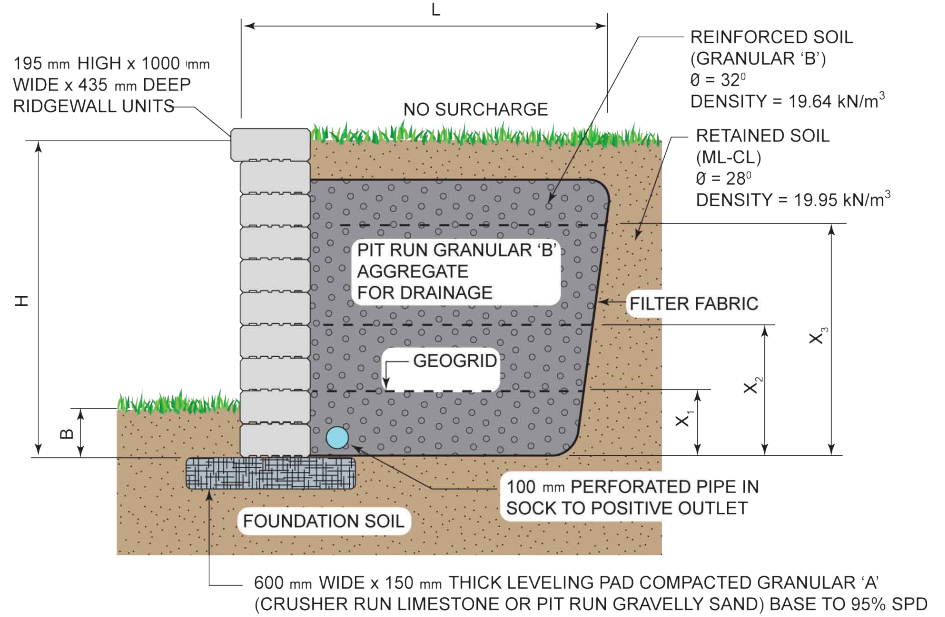


GEOGRID REINFORCED RIDGEWALL
CROSS SECTION WITH LEVEL BACKFILL
AND NO SURCHARGE



Ridge-to-Ridge & Key-to-Key Installation (Best Practice where possible)

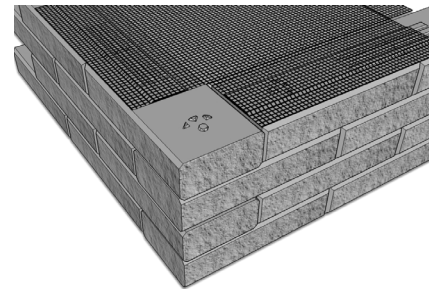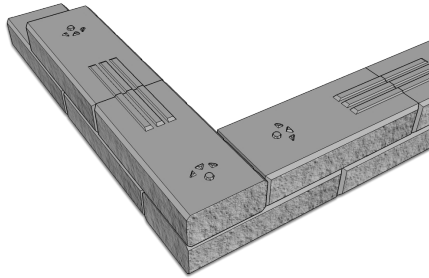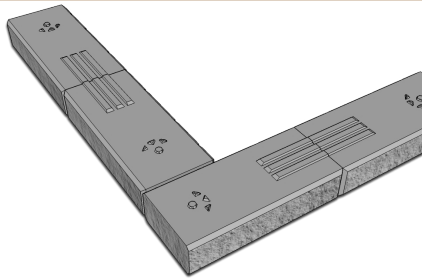

90 Corner - Row 1 & 2 (Continue same sequence for following rows) + typical grid placement

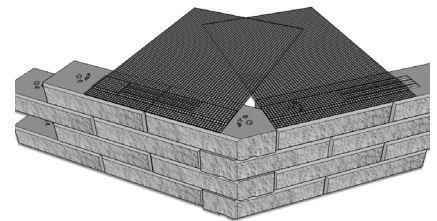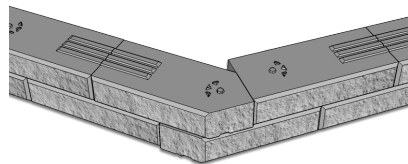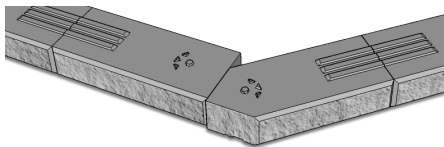

45 Corner - Row 1 & 2 (Continue same sequence for following rows) + typical grid placement

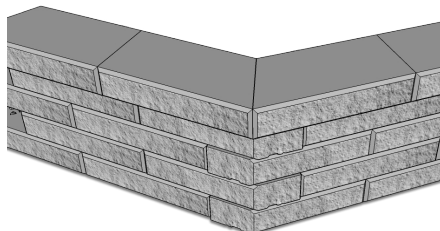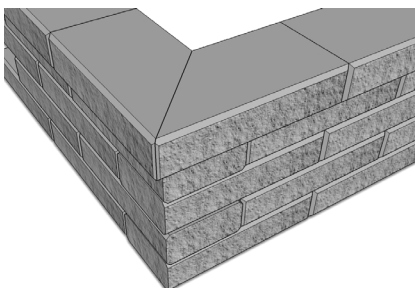

Reverse side of
435 Split Block

IKON™




CLASSIC SERIES | SMOOTH FINISH WALL | LARGE SRW

**UNITS****BLOCK**


39.4w x 6.7h x 14d in
1000w x 170h x 355d mm
Units/bundle: 9

**COPING**

39.4w x 6.7h x 14d in
1000w x 170h x 355d mm
Units/bundle: 9

BUNDLE OVERVIEW**COLOURS****OFF-SET LOCKING SYSTEM****VERTICAL**


Alternate the direction of units each row. Off-set locking feature align to create vertical finish.

30 MM OFF-SET

Install units in the same direction. Off-set locking feature creates a 30 mm set back.

BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	16.5 ft ²	1.53 m ²
Lineal coverage	29.53 ft	9 m
Weight	2745 lbs	1245 kg
Weight per unit	305 lbs	138.3 kg
Coverage per unit	1.83 ft ²	0.17 m ²
Lineal coverage per unit	3.28 ft	1 m

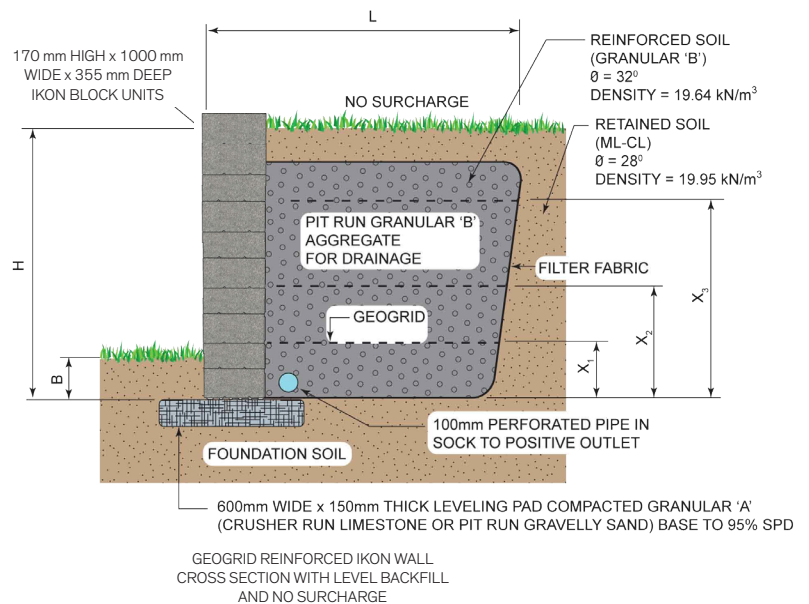TYPICAL CROSS SECTION**NOTES**

Large format segmental retaining wall with a double-sided smooth finish. Units can be reversed to set-back the wall system.

Engineering details and services available for the Ikon™ wall system, email sales@bestwaystone.com for details.





PAVERS



	mm
28 Ashford™	60
29 Standard™	60 & 80
30 Adelaide® 80	80
31 EcoFlow® 80 Permeable	80
32 Prisma™	60
33 Vanguard™	100



UNITS



13 x 8.66 x 2.36 in
330 x 220 x 60 mm
Units/bundle: 54
Units/layer: 6




8.66 x 8.66 x 2.36 in
220 x 220 x 60 mm
Units/bundle: 72
Units/layer: 8



8.66 x 4.33 x 2.36 in
220 x 110 x 60 mm
Units/bundle: 54
Units/layer: 6

BUNDLE OVERVIEW



COLOURS



Colorado
Grey



Grey Mix



Summer
Mist

BUNDLE SPECIFICATIONS



	IMPERIAL	METRIC
Coverage	93.75 ft ²	8.71 m ²
Weight	2628 lbs	1192 kg
Layers	9	
Coverage per layer	10.42 ft ²	0.97 m ²
Lineal coverage	130 ft	39.6 m
Lineal coverage per layer	14.44 ft	4.4 m

NOTES

For pedestrian and/or vehicular use.
Provides a classic smooth surface
with subtle edges. Install in a 3:4:3
ratio.

Can border/accent with Standard™,
Napa™, Balsam™ and other 60 mm
options for consistent grades.

PATTERNS



13" Soldier Course



8.66" Soldier Course





UNITS




3.93 x 7.87 x 2.36 in
100 x 200 x 60 mm
Units/bundle: 486
Units/layer: 54



3.93 x 7.87 x 3.15 in
100 x 200 x 80 mm
Units/bundle: 432
Units/layer: 54

BUNDLE OVERVIEW



COLOURS



Buff Mix*



Buff-Brown Mix*



Charcoal



Grey



Grey Mix



Red*



Red Mix*





Salmon Mix*

BUNDLE SPECIFICATIONS

60mm	IMPERIAL	METRIC
Coverage	106 ft ²	9.85 m ²
Weight	2862 lbs	1298.18 kg
Rows	9	
Coverage per row	11.78 ft ²	1.09 m ²
Lineal coverage	156.2 / 312.8 ft	47.7 / 95.4 m
Lineal coverage per row	17.35 / 34.75 ft	5.3 / 10.6 m
Coverage per unit	0.22 ft ²	0.02 m ²
Units per ft ² / m ²	4.59	49.34

80mm	IMPERIAL	METRIC
Coverage	94.2 ft ²	8.72 m ²
Weight	3304 lbs	1499 kg
Rows	8	
Coverage per row	11.78 ft ²	1.09 m ²
Lineal coverage	138.8 / 278.0 ft	42.4 / 84.8 m
Lineal coverage per row	17.35 / 34.75 ft	5.3 m / 10.6 m
Coverage per unit	0.22 ft ²	0.02 m ²
Units per ft ² / m ²	4.59	49.34

PATTERNS



NOTES

For pedestrian and/or vehicular use.

Sold in full bundles only.

*80 mm are special order.

ADELAIDE® 80

SIGNATURE SERIES | 80 mm




UNIT



6.5 x 13 x 3.15 in
 165 x 330 x 80 mm
 Units/bundle: 168
 Units/layer: 21

BUNDLE OVERVIEW



COLOURS

Glacier
Creek

Grey





Ultra Black

BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	98.4 ft ²	9.1 m ²
Weight	3622 lbs	1643 kg
Layers	8	
Coverage per layer	12.3 ft ²	1.14 m ²
Lineal coverage	91 / 182 ft	27.7 / 55.4 m
Lineal coverage per layer	11.38 / 22.75 ft	3.46 / 6.93 m

PATTERNS



NOTES

For pedestrian and/or vehicular usage.

Can be used on its own or as a modern accent and/or border for the Trevista® 80 pavers.

The smooth surface provides a contemporary finish.

ECOFLOW[®] PERMEABLE PAVER

SIGNATURE SERIES | 80 mm




UNIT



4.92 x 9.84 x 3.14 in
125 x 250 x 80 mm
Units/bundle: 256
Units/layer: 32

Joint Width: 7 mm (9/32")
% Surface Opening: 8.4%
Infiltration Rate: mm/h 22,962

BUNDLE OVERVIEW



COLOURS



Colorado
Grey



Grey




Grey Mix

BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	86.08 ft ²	8 m ²
Weight	2900.9 lbs	1315.8 kg
Layers	8	
Coverage per layer	10.76 ft ²	1.0 m ²
Lineal coverage	104.96 / 209.92 ft	32 / 64 m
Lineal coverage per layer	13.12 / 26.24 ft	4 / 8 m



PATTERN



NOTES

EcoFlow[®] delivers a clean, modern and sophisticated aesthetic. Manufactured using DesignLoc[®] technology, the two-step manufacturing process creates a refined top layer while reinforcing a strong, durable base. EcoFlow[®] is designed to have strategic spacer bars that create greater infiltration between units, enabling efficient water drainage meeting Canadian Masonry and Hardscape Association specifications.


For pedestrian and/or vehicular use.

PRISMA™

SIGNATURE SERIES | 60 mm




UNITS



7.76 x 8.96 x 2.36 in
197 x 227.5 x 60 mm
Units/bundle: 162
Units/layer: 18


BUNDLE OVERVIEW



COLOURS



Carrara




Ultra Black

BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	58.57 ft ²	5.44 m ²
Weight	1620 lbs	735 kg
Layers	9	
Coverage per layer	6.51 ft ²	0.60 m ²

PATTERNS

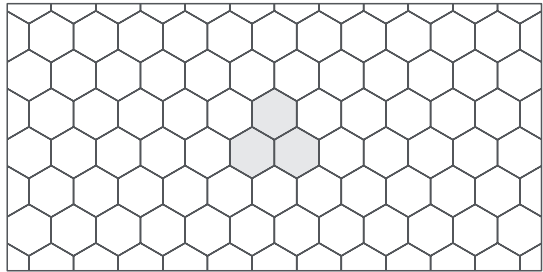

NOTES

The Prisma™ paver blends timeless aesthetics with a modern twist, ideal for cutting-edge hardscape designs. Its elongated hexagonal form brings a distinctive geometric flair to landscaping, seamlessly integrating with various contemporary outdoor areas. Elevating projects, Prisma introduces chic style and dimension.



UNITS

8 x 24



7.87 x 23.63 x 3.94 in
200 x 600 x 100 mm
Units/bundle: 48
Units/layer: 8

4 x 12



3.94 x 11.81 x 3.94 in
100 x 300 x 100 mm
Units/bundle: 216
Units/layer: 36


4 x 12 Edge Surface




3.94 x 11.81 x 3.94 in
100 x 300 x 100 mm
Units/bundle: 216
Units/layer: 36

BUNDLE OVERVIEW


4 x 12



8 x 24



COLOURS

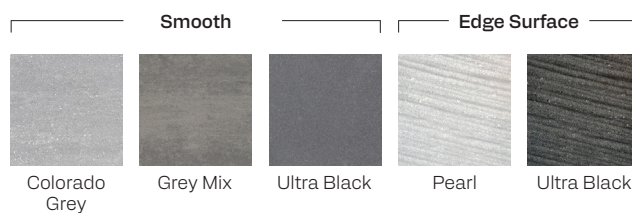

BUNDLE SPECIFICATIONS


8 x 24

	IMPERIAL	METRIC
Coverage	62 ft ²	5.76 m ²
Weight	2825.4 lbs	1281.6 kg
Layers	6	
Coverage per layer	10.33 ft ²	0.96 m ²
Lineal coverage	31.48 / 94.52 ft	9.8 / 28.8 m
Lineal coverage per layer	5.25 / 15.75 ft	1.6 / 4.8 m


4 x 12 / Edge Surface

	IMPERIAL	METRIC
Coverage	69.8 ft ²	6.48 m ²
Weight	3238 lbs	1469 kg
Layers	6	
Coverage per layer	11.63 ft ²	1.09 m ²
Lineal coverage	70.92 / 212.58 ft	21.6 / 64.8 m
Lineal coverage per layer	11.82 / 35.43 ft	3.6 / 10.8 m


PATTERNS

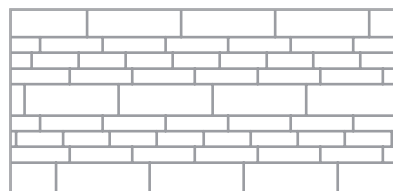

4" x 12" / 8" x 24" Mix



Running Bond



Herringbone

NOTES

Designed for any commercial space, Vanguard™ combines a contemporary finish, with durability and comfort. Mix and match surface finishes and colours to create a dynamic and engaging space.

4 x 12 Edge Surface available by special order only.

SRI VALUES & SPECIFICATIONS

SRI VALUES

COLOUR	SRI	SR%
Brightsand	52	45%*
Buff Brown	21	21%
Carrara	30	27%
Colorado Grey	41	37%*
Eclipse	60	51%*
Glacier Creek	34	31%*

COLOUR	SRI	SR%
Grey	35	29%*
Grey Mix	23	22%
Pearl	43	38%*
Red	26	27%
Red Mix	22	21%
Salmon Mix	21	20%

COLOUR	SRI	SR%
Silverlight	34	31%*
Summer Mist	41	36%*
White (Basketweave)	51	44%*
White (SR Paver)	82	67%**

* Meet Leed (29) non-roof

** Meet Leed (80) rooftop

PHYSICAL AND GEOMETRIC CHARACTERISTICS

Precast Concrete Paving Slabs

CHARACTERISTICS	CSA A231.1
Flexural strength	5.0 MPa (725 psi) min.
Freeze-thaw durability with use of deicing salt	Mass loss (max.): 225 g/m ² at 28 cycles Mass loss (max.): 500 g/m ² at 49 cycles
Dimensional tolerance ¹	Length and Width: -1.0 mm to +2.0 mm Thickness: ±3.0 mm
Concave or Convex Warpage (up to and including 450mm)	±2.0 mm
Concave or Convex Warpage (over 450mm)	±3.0 mm

¹ The dimensional tolerance prior to the application of architectural finishes.

Precast Concrete Pavers

CHARACTERISTICS	CSA A231.1
Compressive strength	50.0 MPa (7252 psi) min.
Freeze-thaw durability with use of deicing salt	Mass loss (max.): 225 g/m ² at 28 cycles Mass loss (max.): 500 g/m ² at 49 cycles
Dimensional tolerance ¹	Length and Width: -1.0 mm to +2.0 mm Thickness: ±3.0 mm

¹ The dimensional tolerance prior to the application of architectural finishes.

Dry-cast Wall Units

CHARACTERISTICS	ASTM C 1372
Compressive strength	20.7 MPa (3000 psi) min.
Durability to freeze thaw cycles Mass loss	after 100 cycles 1% (max.) after 150 cycles 1.5% (max.)
Water absorption	208 kg/m ³ max. (13 lb/ft ³)
Dimension tolerance ¹	length: ±3.0mm (1/8")
	width: ±3.0mm (1/8")
	height: ±3.0mm (1/8")

¹ The dimensional tolerance not applicable to split facings or other architectural finish.

² ASTM C1372 Standard specifications for Dry-Cast, SRW units.


OUR LOCATIONS

WOODBIDGE

8821 Weston Rd
Woodbridge, ON
L4L 0K9

1-800-BESTWAY
(2378929)


T (905) 851-5122
T (416) 747-0988
F (905) 851-7603

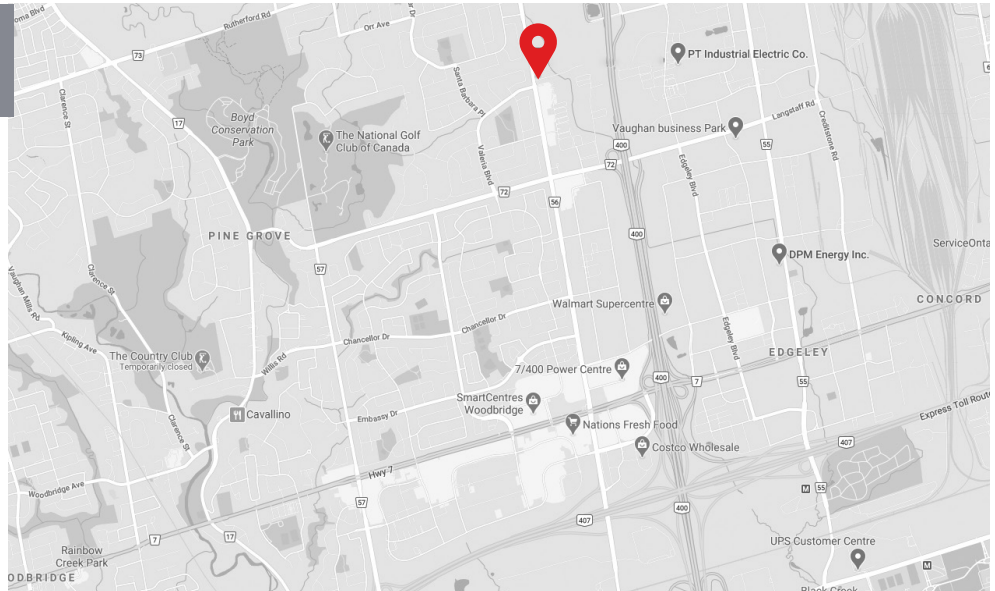

UXBRIDGE

65 Anderson Blvd
Uxbridge, ON
L9P 0C7

T (905) 640-5845
F (905) 640-9773

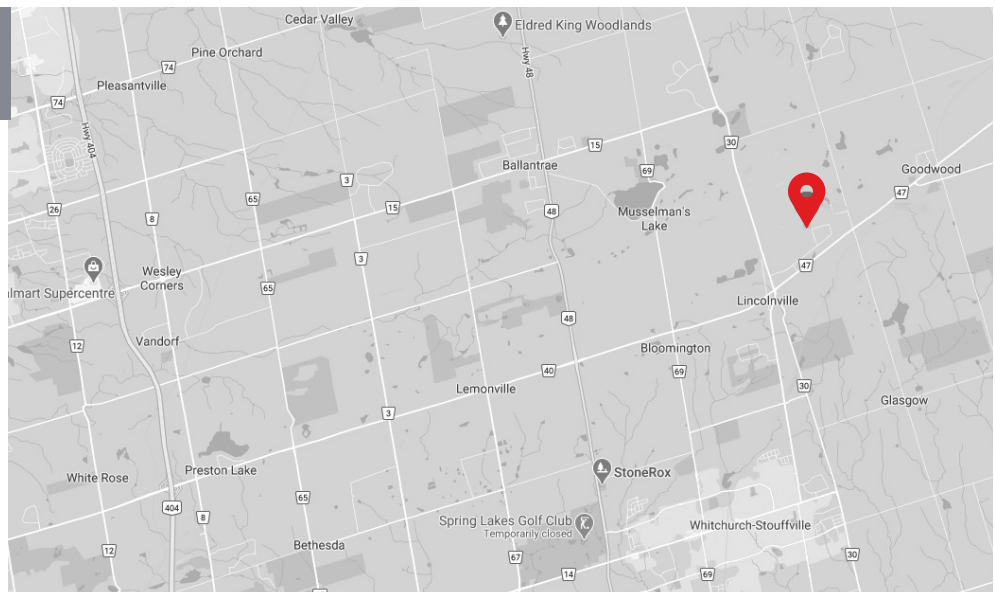







1-800-bestway (237-8929)
bestwaystone.com

Woodbridge (Head Office)

8821 Weston Road
Woodbridge, ON L4L 0K9
T 905-851-5122
F 905-851-7603

Uxbridge

65 Anderson Boulevard
Uxbridge, ON L9P 0C7
T 905-640-5845
F 905-640-9773



@bestwaystone



@bestwaystone



facebook/bestwaystone



@bestwaystone



@bestwaystone